


EC-UU004-6-PVC-GY

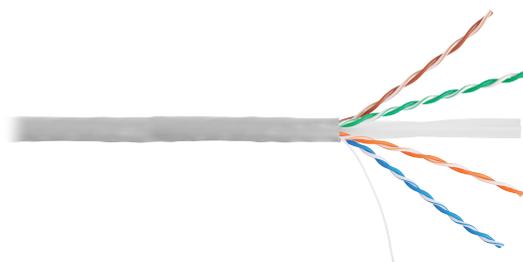

Cable U/UTP 4 pair 0.505mm, Cat.6, indoor, PVC, solid, grey, 305m

Таблица заказа

P/N	Cat.	Construction	Volume, m3	Weight, kg
EC-UU004-6-PVC-GY	6	U/UTP	0.033600	11.520

EC-UU004-6-PVC-GY

Cable U/UTP 4 pair 0.505mm, Cat.6, indoor, PVC, solid, grey, 305m

Детальные характеристики

Характеристика	Значение
Category	6
Bandwidth, MHz	250
Construction	U/UTP
Number of twisted pairs	4
Conductors material	Bare copper
Conductors type	Solid
Diameter of wire	0,505±0,005
Conductors insulation material	HDPE
Conductors insulation thickness, mm	0,9±0,02
Conductors insulation outer diameter, mm	0,92±0,03
Outer jacket material	PVC
Usage	Indoor
Jacket thickness, mm	0,5±0,05
Jacket outer diameter, мм	5±0,2
Jacket color	Grey
Protective film	-
Separation	Polyester
Ripcord	+
Mass density per unit length, kg/km	29,3
Bending radius without load, D	≥8
Bending radius with load, D	≥4
Tensile strength, H	≤80
Burst strength, H	≤400
Impedance, Ом	100±15
Max. conductor resistance (DC), Ω/km	93
Standard compliance	Meets the standards requirements: Standard compliance ISO/IEC 11801, EN 50173 and TIA/EIA-568
Application supporters	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, 2.5GBASE-T, 5GBASE-T, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR4, TR-16 Active, TR-16 Passive
Temperature ranges	Storage from -20 to +60. Installation from 0 to +50. Exploitation from -20 to +60
Length, m	305
Package	Individual - cardboard box / transport cardboard box (2 individual boxes)
Package sizes (individual/transport), mm	-
Warranty	1 year