


## EC-UU050-5-PVC-GY-3

Cable U/UTP 50 pairs 0.47 mm, indoor, PVC, solid, gray, 305m

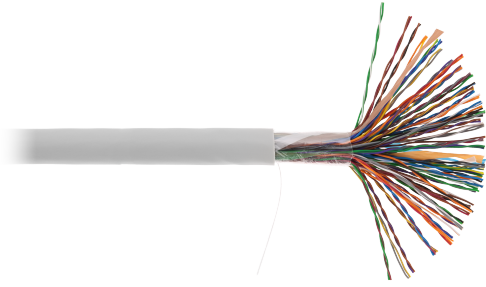

The cable **EC-UU050-5-PVC-GY-3** contains 50 pairs of twisted copper conductors, made in unshielded version (U/UTP), corresponds to category 5 and is intended for indoor installation. The outer shell is made of polyvinyl chloride. It is delivered on plywood drums on 305m guaranteeing safety during transportation, constant characteristics and ease of use during unwinding and installation.

### Таблица заказа

P/N	Number of pairs.	Cat.	Construction	Volume, m3	Weight, kg	
EC-UU050-5-PVC-GY50	5	5	F/UTP	Indoor	0.165528	97.600

# EC-UU050-5-PVC-GY-3

Cable U/UTP 50 pairs 0.47 mm, indoor, PVC, solid, gray, 305m

## Детальные характеристики

Характеристика	Значение
Category	5
Bandwidth, MHz	100
Type	UTP
Number of pairs	50
Material of conductors	Copper
Type of conductors	Solid
Diameter of conductors,mm	0.47
Insulation material	HDPE
Insulation conductor thickness, mm	0.19 ± 0.02
Diameter of conductor insulation, mm	0.85 ± 0.05
Outer jacket diameter, mm	PVC
Application	For indoor laying
Jacket thickness, mm	1.15 ± 0.05
Outer jacket diameter, mm	15.7 ± 0.2
Jacket color	Gray
Protective film	Yes
Ripcord	Yes
Mass density (kg) per unit length (km)	285.0
Radius of bending during laying	No less 10
Radius of bending during operation	No less 10
Maximum tensile strength	No less 100
Characteristic impedance, ohms	100 ± 15
Compliance	Meets the requirements of standards: ISO/IEC 11801, EN 50173 и TIA/EIA-568
Supported Applications	10BASE-T, 100BASE-TX, 100BASE-T4, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
Length, m	305
Temperature ranges	Storage from -20 to +60 °C. Installation from 0 to +50 °C. Operation from -20 to +60 °C
Warranty	1 year